


# C007KP/CAH

銀箭牌

Ultra High Speed Cylinder Bed Interlock Sewing Machine with Semi-auto Bottom Hemming Device



超高速筒型绷缝机 搭配半自动下摆装置

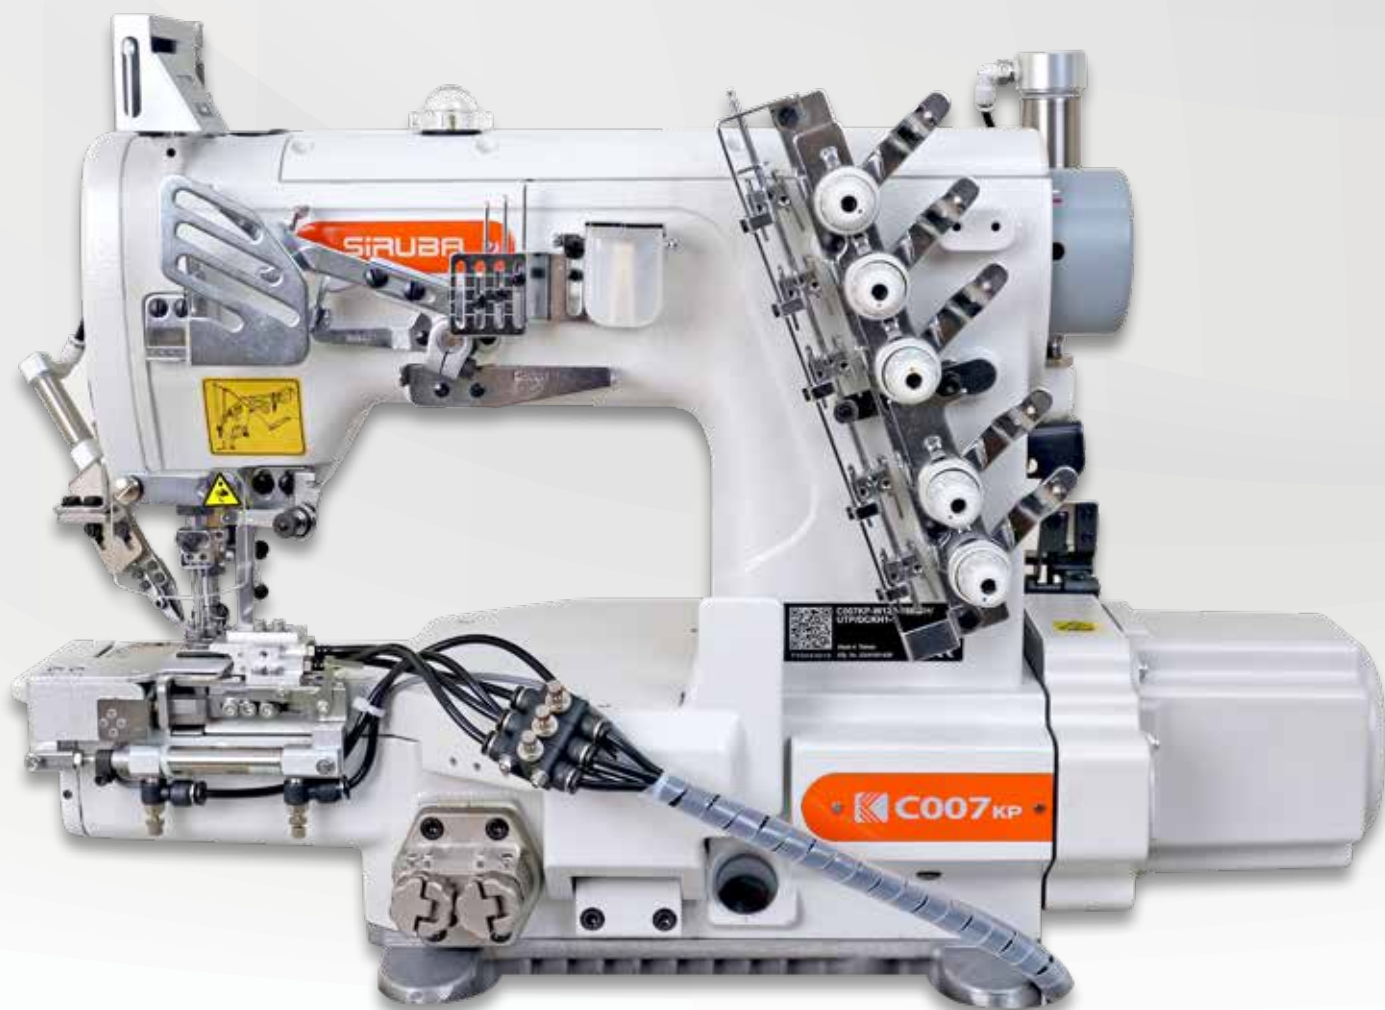


在上下切刀、油封结构、上夹线装置、移动送齿之传动设计等特点的基础上，增加CAH半自动下摆装置，让下摆车缝更快速、稳定，并可轻松操作、增加效率、提升产能。

On the basis of the characteristics of upper and lower cutters, oil sealing structure, upper thread gripper, and differential feed dog driving design, the CAH semi-automatic hemming device is added to make hem sewing faster and more stable, and it can be easily operated, increasing efficiency and production capacity.


 SIRUBA

# 特点


# FEATURES

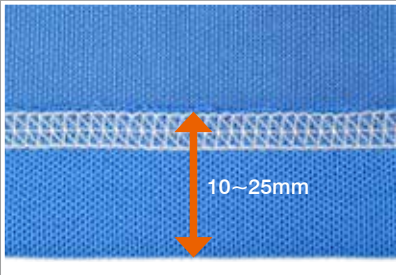

折边宽度距离相同  
The distance of width is consistent.

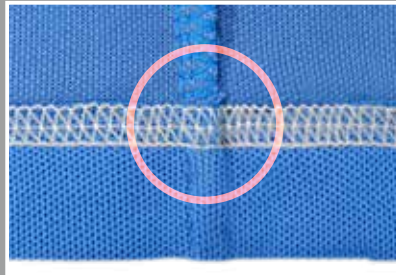

缝纫结束的缝线和骨位对齐  
The stitches at the end of sewing is aligned with the seam.

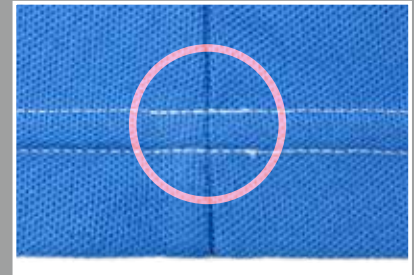

起缝和结束线迹完全对齐  
The start and end stitches are perfectly aligned.



快速，稳定，操作简易且流畅：

不需特定手势与技巧，只要扶好布料即可轻易完成下摆车缝。操作顺畅，一气呵成，增加车缝效率。线迹与折缝边缘宽度一致、完美呈现。

Fast, stable and easy to operate:

With the CAH device, you can easily sew the hem as long as holding the fabric without specific gestures and skills. Allows for smooth operation while increasing sewing efficiency. The fixed distance between stitches and the edge of fabric makes sewing quality consistent.

搭配辅助配件。实现接近全自动操作：









搭配CAH折布装置，可连续操作接近全自动流程(自动控制吹气。车缝完成后，CAH折布装置自动回复位置，并自动停针和切线)。

With auxiliary function accessories to achieve almost fully automatic operation:

Equipped with CAH hemming device, it can operate continuously and close to fully automatic process (Control the air blowing function automatically. Moreover, the CAH hemming device returns to its position, the needle stops and the thread end is cut automatically after the sewing is completed.)

# 规格

# SPECIFICATIONS

COO7KP	 ⑥ Needle No.		 mm ⑦	 mm		 mm	 ⑨	 S.P.M. (Max)
W122-⑥⑦/CAH⑨	2	4	3.2/ 4.0/ 4.8	1.4 ~ 3.6	0.3 ~ 2.9	5/7	H / U	5000
	3	5	4.8/ 5.6/ 6.4	1.4 ~ 3.6	0.3 ~ 2.9	5/7	H / U	5000
W162-⑥⑦/CAH⑨	2	4	4.0/ 4.8	1.4 ~ 3.6	0.3 ~ 2.9	5/7	H / U	5000
	3	5	4.8/ 5.6/ 6.4	1.4 ~ 3.6	0.3 ~ 2.9	5/7	H / U	5000

選購配件 OPTIONAL DEVICE : UTP, UTQ, UTR, UTS



高林股份有限公司  
KAULIN MFG. CO., LTD.

由於对产品的改良及更新，本产品型录中之产品规格及外观的修改恕不事先通知！  
The specification and/or appearances of the equipment described in this catalogue are subject to change without previous notice because of modification.

C.S2023-27. AUG. 2023