



## D007L/ET/EK/EW7

四针六线并缝机搭配电动切线及 抬压脚装置

Four-Needle Six-Thread Flatseam Machine with Electric Thread Trimmer and Presser Foot Lifter



### FEATURES



线道采精密陶瓷设计,使过线收线更加顺畅,线迹更均匀稳定,有效提升 车缝效果。

The ceramic precision design of the line that makes the winding line is smooth. Stitches are better stable and average, and the sewing effect is effectively improved.



马达加装散热风扇,高速车缝较稳 定。

Motor equipped with a cooling fan for more stable high-speed sewing.



抬压脚机构弹性伸缩防尘保护套:有效防止布屑及灰尘进入。

Presser foot lifting mechanism with a flexible dust-proof protective cover: effectively prevents fabric scraps and dust from entering.



一体成型挡油墙: 有效防止漏油可能 Integrated oil retaining wall: effectively prevents potential oil leaks.



The front and rear body fully enclosed design to prevent oil leaks and dust ingress.



手转螺丝,可直接调整至适当位置。 The thumb screw can be directly adjusted to the appropriate position.

## 配件 DEVICE

EK 电眼电动切线组

Sensor controlled electronic type chain cutter

EW7

外接空压式吸布屑组 \* 需外接空压机 ( 搭配 EK) External compressor type waste suction set \*for compressor compatible (for EK)

有效取代传统手工剪线流程,省时、省力、提高生产 效率。

Effectively replaces traditional manual thread trimming, saving time and effort while improving production efficiency.

**2** 使用气动 / 电动驱动吸线头更稳定、确实,特别适用 於薄布料。

The use of pneumatic/electric drive to remove thread ends is more stable and reliable, especially suitable for thin fabrics.

滑轨设计较耐久使用,无须担心松线问题。 The slide rail design is durable, therefore eliminating concerns about loose threads.

24 独特刀架设计调节方便,精准剪线稳定。 The unique knife holder design is easy to adjust and provides precise and stable cutting. AK

电眼气动切线组

Sensor controlled pneumatic type chain cutter

AW7


外接空压式吸布屑组 \* 需外接空压机 ( 搭配 AK) External compressor type waste suction set \*for compressor compatible (for AK)

5 光眼布边识别,专业反光面设计杜绝识别失误更加稳定。

Eye-sensor fabric edge detection with a specialized reflective surface design ensures more stable recognition and eliminates errors.

多项可调式功能设计,包含斩刀滑轨、吸风装置、线头吸风高度与活动刀压力皆可依需求灵活调整,差动调整更直觉,轻松因应各类布料,实现最佳缝制品质。

Multiple adjustable functions, including the cutter with slide rail, suction device, thread suction height and movable knife pressure, can be flexibly adjusted according to needs. Differential adjustment is more intuitive, easily adapting to various fabrics and achieving optimal sewing quality.

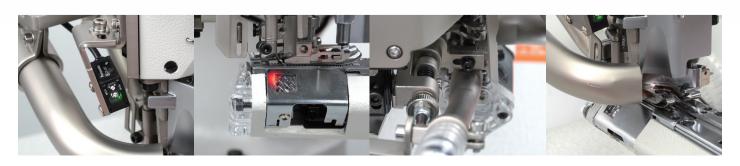

## 1 2 3 4 5 7 8 8 D007L - 4 52 - 02 H - ET/ EK/EW7

- ① 机种别 Model
- 5 特殊规格 Special Specification
- 2 针数 Needle Numbers
- **6** 车缝功能 Seaming Function
- 3 针距 Needle gauge
- **⑦** 抬压脚规格 Foot Lifter Specification
- **4** 切刀 Trimmer
- 8配件 Device

D007L	×	٨	<b>3</b>	mm    	<b>W</b> W 00	mm	Needle No.	S.P.M.
D007L-452-01	4	6	5.2	1		8	FL X 118GCS (4 PCS) FLG - 1 (1 PC)	4200
D007L-460-01	4	6	6.0			8		4200
D007L-452-02	4	6	5.2			6		4200
D007L-460-02	4	6	6.0		1:0.7	6		4200
D007L-452-02H	4	6	5.2		1:1.5	6		4200
D007L-460-02H	4	6	6.0			6		4200
D007L-452-02H1	4	6	5.2			6		4200
D007L-460-02H1	4	6	6.0			6		4200

#### Remarks:

FLG-1 為假針規格·避免車縫薄軟面料之縫份起皺。

FLG - 1 is a retainer for seaming light / soft materials without seam wrinkling.

Model	Trimming	Cross-section	Fabric Weight			
			Light	Medium	Heavy	
D007L-452-01						
D007L-460-01						
D007L-452-02						
D007L-460-02						
D007L-452-02H						
D007L-460-02H						
D007L-452-02H1						
D007L-460-02H1						

# SIRUBA D007L/ET/EK/EW7 FEATURES