





## VC008N/VUT


机 电 一 体 切 线 裤 腰 车

Mechatronic Waistband Machine with Thread Trimmer



## 产品特点 FEATURES

- 高速、稳定、高功率的一体式直驱,附带编码器伺服马达控制系统,定位精准、运转平稳、高效。 Equipped with a high-speed, high-power integrated direct-drive system with encoder servo motor control, ensuring smooth, stable, and efficient operation.
- 电子控制系统驱动,声音小、速度快、具有更高的精准度和灵活性。
  Electronically controlled drive system offers low noise, high speed, and enhanced precision and flexibility.
- 整合式多功能一体机型,安装简单、性能更好。 An integrated all-in-one multifunction system—simple to install, powerful in performance.
- 搭配气动切线、松线、抬压脚功能,使用方便、提升缝制效率。 Combined with pneumatic thread trimming, thread releasing, and presser foot lifting functions, it provides ease of use and significantly boosts sewing efficiency.
- 一系列齐全、完整的配套功能,满足所有需求。 A full range of comprehensive support functions designed to satisfy every operational requirement.

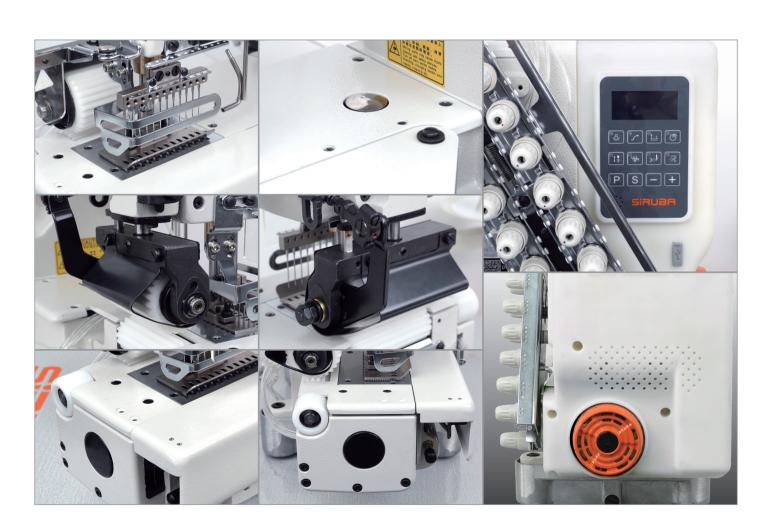

	1		→     ←	每单位 (Unit)=1.6mm=1/16"	Remark
				26 24 22 20 18 16 14 12 10 8 6 4 2 2 4 6 8 10 12 14 16 18 20 22 24 25	
VC008N-04064P	4	8	1/4"(6.4mm)		
VC008N-04085P			1/3"(8.5mm)		
VC008N-04095P			3/8"(9.5mm)		
VC008N-04106P			5/12"(10.6mm)		
VC008N-04127P			1/2"(12.7mm)		
VC008N- 04A32-032P			(1/4-1/8-1/8-1/4")*3 (6.4-3.2-3.2-6.4mm)*3		A
VC008N-04A64P			1/4"(6.4mm)		
VC008N- 12A32-032P		12	(1/4-1/8-1/8-1/4")*3 (6.4-3.2-3.2-6.4mm)*3		В
VC008N-12A64P	6		1/4"(6.4mm)		
VC008N-12048P	12	24	3/16"(4.8mm)		
VC008N-12064P			1/4"(6.4mm)		
VC008N-12050P			1/5"(5.0mm)		
VC008N-13032P	13	24*	1/8"(3.2mm)		
VC008N-13064P			1/4"(6.4mm)		С
VC008N-1332-032P			(1/4-1/8-1/8-1/4")*3 (6.4-3.2-3.2-6.4mm)*3		
VC008N-17032P	17	24*	1/8"(3.2mm)		D
VC008N-21032P	21	24*	1/8"(3.2mm)		Е
VC008N-23032P	23	24*	1/8"(3.2mm)		F

A:13 针规格组,配4组针/勾针

B:13 针规格组,配6组针/勾针

C:13 针规格组,配13 组针/勾针

D:17针规格组,配17组针/勾针

E: 21 针规格组,配 21 组针/勾针F: 23 针规格组,配 23 组针/勾针

\* 线架组最多可安装 24 组线

A: 13-Needle gauge set with 4 sets of needle/ looper.
B: 13-Needle gauge set with 6 sets of needle/ looper.

C: 13-Needle gauge set with 13 sets of needle/ looper.

D: 17-Needle gauge set with 17 sets of needle/ looper.

E: 21-Needle gauge set with 21 sets of needle/ looper.
F: 23-Needle gauge set with 23 sets of needle/ looper.

\*The maximum number of threads stand installed is 24 sets.

## SIRUBA VC008N/VUT FEATURES