


DT8600

Mechatronic Big-Bobbin Double-Needle
Lockstitch Machine with Thread Trimmer

机电一体 大梭切线双针车

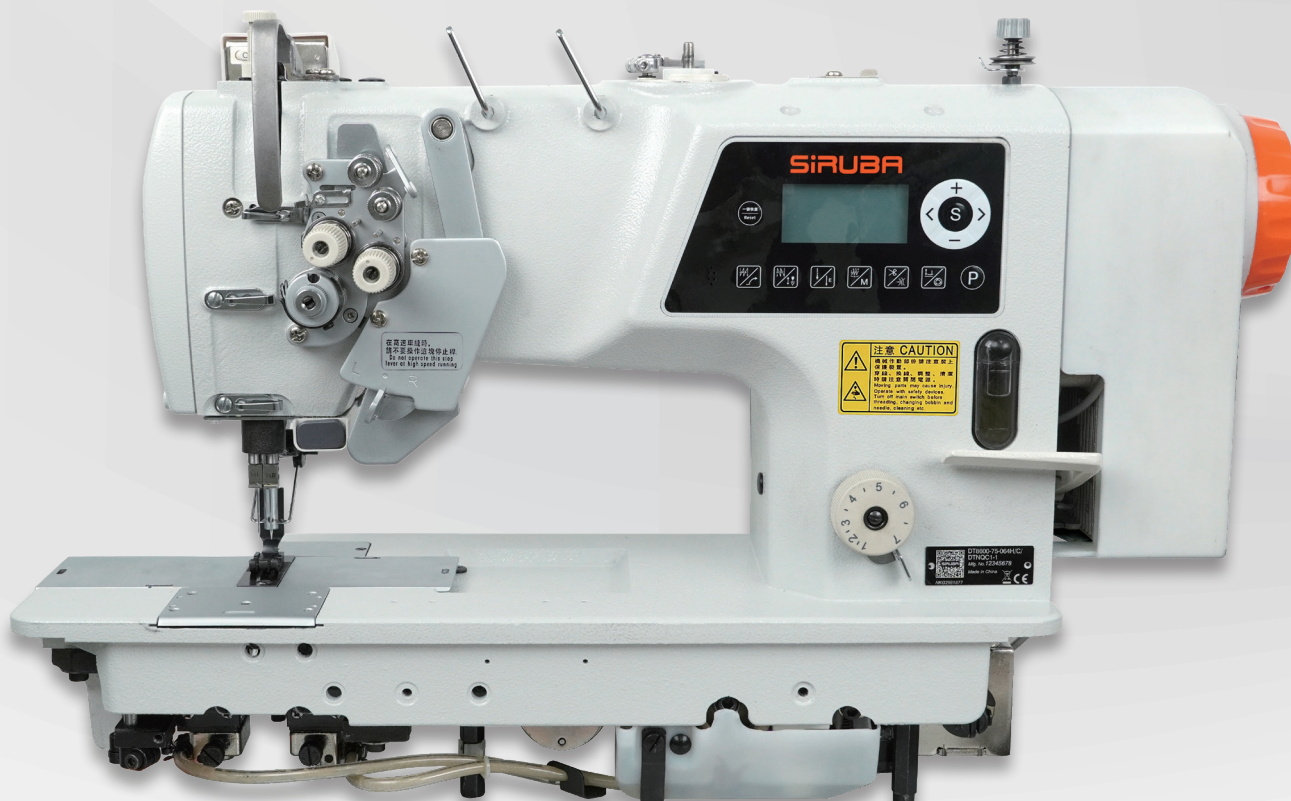

- 上轴采用通轴设计，整体力矩轻，机器运转平稳，送料流畅。
- 采用750W大功率伺服电机直接驱动，噪音低、振动小、安装方便、启动停车反应迅速，机针贯穿力强。
- 全自动切线、扫线、倒缝、抬压脚装置，操作简便迅速。

- The upper shaft adopts the through-all design; the overall torque is light; the machine runs smoothly; and the feeding is smooth.
- 750W high-power servo motor: larger needle penetration force, lower noisy, lower vibration, easier to install and shorter responding time.
- Fully automatic thread trimming, thread releasing, thread sweeping, reverse stitching, and presser foot lifting mechanisms enable quick and easy operation.

特点

FEATURES


- 1 控制操作面板，操作内容直观，简单方便。**
The control panel offers intuitive and user-friendly operation.

- 2 倒缝拨杆装置：**
可以轻松实现倒缝缝纫。
Reverse lever:
Easy to achieve reverse seam.

- 3 缝距控制钮：**
转动调整达到理想缝距。
Stitch length control button:
Rotate to get ideal stitch length.

- 4 直刀剪线结构：**
直刀剪线机构，剪线稳定。
Straight knife system :
Straight knife thread trimming mechanism, stable thread trimming.

- 5 边角缝装置：**
从缝纫角度和针数决定距宽，来做到美丽之边缝。
Split stitching device:
Decide the ideal width by sewing angle and stitches numbers, it will make good quality of split stitching.

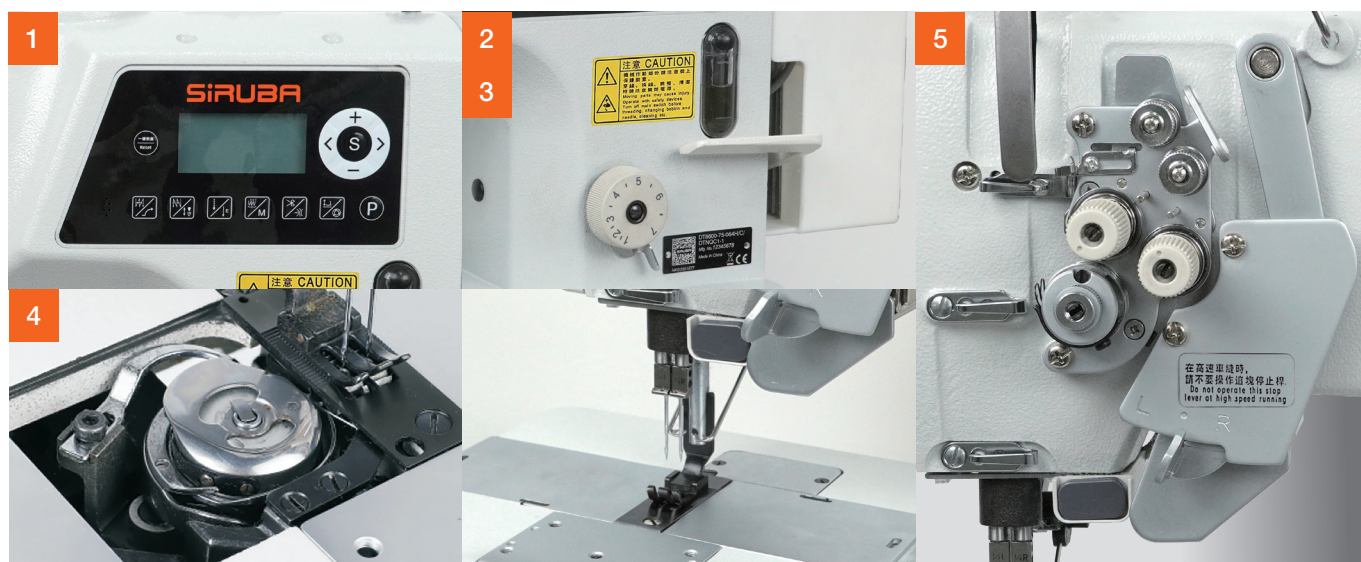

规格

SPECIFICATIONS

DT8600	mm	Needle No. DP × 5	布料厚度 Fabric Weight			mm 手动 Hand	mm	S.P.M. (Max)	mm	KG
			L	M	H					
42	4.8 / 6.4	#14 - #22				7	M : 0~4 H : 0~5	3600 3000		
45	4.8 / 6.4	#14 - #22				7	M : 0~4 H : 0~5	3000	L730 W315 H670	49 / 52
72	4.8 / 6.4	#14 - #22				7	M : 0~7 H : 0~7	3000		
75	4.8 / 6.4	#14 - #22				7	M : 0~7 H : 0~7	3000		

功能 Function	规格Sub-Class	针送 Needle Feed	标准旋梭 Standard Hook	大旋梭 Big Hook	角缝 Split Needle Bar
	42	V	V	-	-
	45	V	V	-	V
	72	V	-	V	-
	75	V	-	V	V



高林股份有限公司
KAULIN MFG. CO., LTD.

由於对产品的改良及更新，本产品型录中之产品规格及外观的修改恕不事先通知！
The specification and/or appearances of the equipment described in this catalogue are subject to change without previous notice because of modification.

AUG. 2025