

700L SERIES

銀箭牌



You Tube



YOUKU

767L-644X-3-528

高速宽边距包缝机

High Speed Wide Overedge Overlock Sewing Machine

专为车缝牛仔布料设计 15mm 宽边距包缝，线迹平稳、美观、高品质的缝制体验。

It is specially designed for denim fabric sewing with 15mm overedge width, and with stable stitches, beautiful appearance and high-quality sewing experience.



You Tube



YOUKU



747L-503M-2-23

鱼骨缝包缝机

Fishbone Stitch Overlock Sewing Machine

ASO-FPM100

鱼骨扒缝机

Fishbone-seam Peeling Machine



适用于不同厚度、弹性的布料。布料透过鱼骨缝拷克缝制，可以容易的将布料摊平，并在布料上呈现整齐且均匀的鱼骨缝线迹，同时增加缝制产品的美观性与舒适性。

Suitable for fabrics in various thickness and elasticity.

Fishbone overlock can spread the fabric, present neat and even fishbone stitches.

Increase the beauty and comfort of finished products.

SIRUBA


767L-644X-3-528



宽边距包缝展示

Wide overedge width.

747L-503M-2-23 & ASO-FPM100

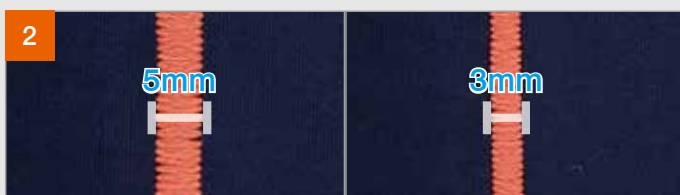

1 双线迹车缝

轻松更换二线、三线，达成不同线迹饰缝。

Two Types Stitches Sewing

Easily convert two threads to three threads for different seams requirement.

2 鱼骨缝宽度

鱼骨缝拷克具有较好的操作性与调整性，可依据缝制包边宽度需求，选用单左针车缝或单右针车缝。使用单左针车缝，其鱼骨缝宽度为5mm；使用单右针车缝，其鱼骨缝宽度为3mm。

Width of Fishbone Stitch

Fishbone stitch has good operability and adjustability. You can choose single left needle sewing or single right needle sewing according to the sewing width requirement. The width of fishbone stitch is 5mm with single left needle; the width of fishbone stitch is 3mm with single right needle.

3 鱼骨扒缝机

使用ASO-FPM100让布料更平整、效果更佳，改善人工扒布造成的线迹不均问题。

Fishbone-seam Peeling Machine

ASO-FPM100 will improve uneven seam issues caused by operator. Make finished product even and have better quality.

① ② ③ ④ ⑤ ⑥ ⑦ ⑧ ⑨

规格

SPECIFICATIONS

747 L - 503 M - 2 - 23 / DKKU

- ① 线数 Thread numbers
- ④ 车缝布料/上勾针缝容量 Sewing fabric/Upper looper capacity
- ⑥ 针距 Needle gauge
- ⑨ 马达 Motor
- ② 机种别 Model
- ⑤ 送具型式 Feed dog type
- ⑦ 包边宽度 Overedge width
- U: U Series
- ③ 缝合方式 Sewing types
- ⑧ 配件 Device

	700L	布料厚度 Fabric Weight				①	⑥	⑦	③	④	⑤	⑧	⑨
		L	M	H	X								
鱼骨缝 Fishbone Stitch	747L-503M-2-23/⑨					1,2	2,3	-	3/5	0.7~2	3.6	6	#11 6500
宽边距包缝 Wide Overedge Width Seaming	767L-644X-3-528/⑨					3	6	5+2	8	0.7~2	3.6	5	#11 6500



由於对产品的改良及更新，本产品型录中之产品规格及外观的修改恕不事先通知
The specification and/or appearances of the equipment described in this catalogue are subject to change without previous notice because of modification.